

PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX  
PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX  
PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX  
PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX PARLUX

yoyo-designs.com



S.

*Style*



# HIPSTER / HI6.01





HI6.01.1 BLACK




HI6.01.2 BROWN



# TECHNICAL / SPECIFICATIONS

## Composition

1. Nominal African Oak Hardwood Top Layer (3,8 mm nominal)
2. Core in spruce blockboard (7mm)
3. Counterbalanced with spruce or poplar veneer (2,2 mm)

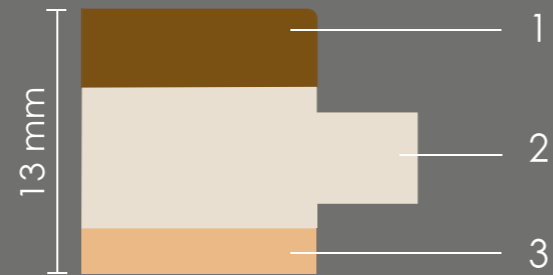

## Identification

Thickness	13 mm
Hardwood top layer	3,8 mm Nominal African Oak
Core in spruce block board	7 mm
Counterbalanced with spruce	2,2 mm
Width	150 mm
Lenghts	1000 / 1200 / 1500 / 1800 / 2000 mm
Finish	Water based lacquer
Locking	Tongue and Groove (T&G)
Upon request	Dry interlock system
Weight	500 kg/m <sup>3</sup> - 6500 g/m <sup>2</sup>
Finish	Open pore
Reaction to fire	Class D <sub>fl</sub> - s1
Emission to formaldehyde	Zero Emissions (no added formaldehyde)
Contain of pentachlorophenol	< 5 ppm
Slipperiness	USRV 100
Thermal resitance	0,059 m <sup>2</sup> K/W
Thermal conductivity	0,22 W / m <sup>2</sup> K

