

TIME HONORED



TH2.01



50 cm




CARPET TILES


TECHNICAL SPECIFICATIONS

Composition

1. High quality brand name Pet Anvire FR®
2. Latex precoat
3. Eva heavy-duty polyolefin layer
4. Highly compacted, dimensionally stable PET fleece fabric

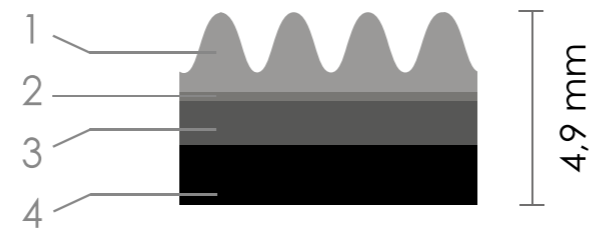

| Identification | Standard | Product Data |
|--------------------------|------------|-----------------------------|
| Type of manufacture | ISO 2424 | Woven |
| Structure | ISO 2424 | Loop pile |
| Pile material | ISO 2424 | 100% PET Anvire FR |
| Dye method | | Print |
| Treatment | | - |
| Primary backing | ISO 2424 | PET |
| Secondary backing | ISO 2424 | TEXtiles |
| Dimensions | ISO 3018 | By order |
| Pattern report | | |
| Effective pile thickness | ISO 1766 | Ca. 2,20 mm |
| Total thickness | ISO 1765 | Ca. 4,90 mm |
| Total pile mass | ISO 2424 | Ca. 655 g/m ² |
| Total mass | ISO 8543 | Ca. 2.300 g/m ² |
| Number of tufts | ISO 1763 | Ca. 156.000 /m ² |
| Stroll test | ISO 6356 | < 2 KV |
| Vertical resistance | ISO 10965 | - |
| Horizontal resistance | ISO 10965 | - |
| Classification | ISO 1307 | 33 Commercial - heavy |
| Luxury rating class | EN 1307 | LC1 |
| Dimensional stability | EN 986 | < 0,2 % |
| Impact sound reduction | ISO 10140 | ΔL_w ca. 20dB |
| Sound absorption | EN ISO 354 | Ca. 0,20 a_w |
| Noise reduction | EN ISO 354 | - |
| Thermal Conductivity | ISO 8302 | Ca. 0,10 m ² K/W |
| Flammability | EN 13501-1 | B _{fl} - s1 |
| ABZ - Nr. | | Z-156.601-1498 |
| IACG - Nr. | | IACG-37-13-05 |



The details given above may be subject to change for the benefit of further improvements.
The displayed floor designs might be slightly different to the original.